



PLAN VIEW

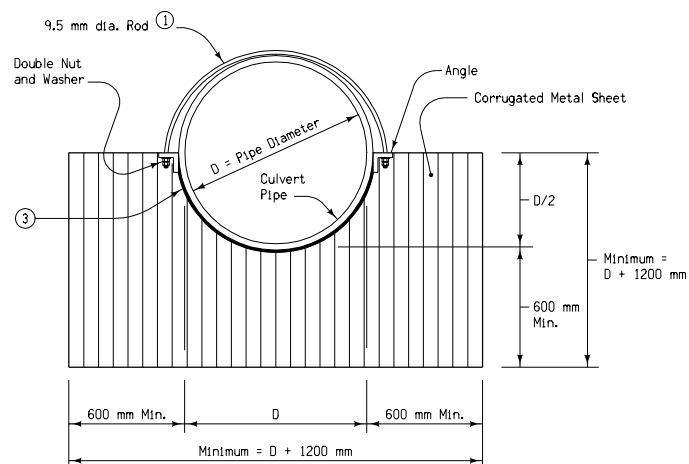


END VIEW

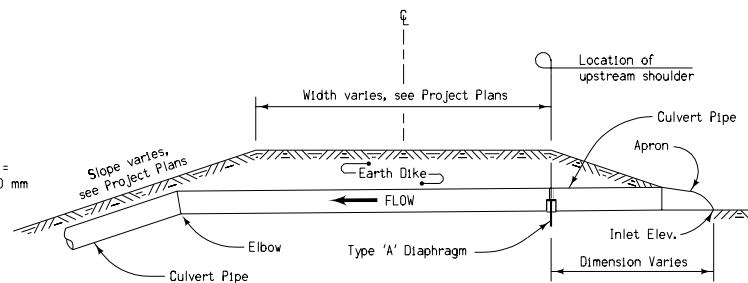

TYPICAL SECTION
OF INSTALLATION

Place diaphragm below upstream shoulder of dike unless otherwise specified on Project Plans.

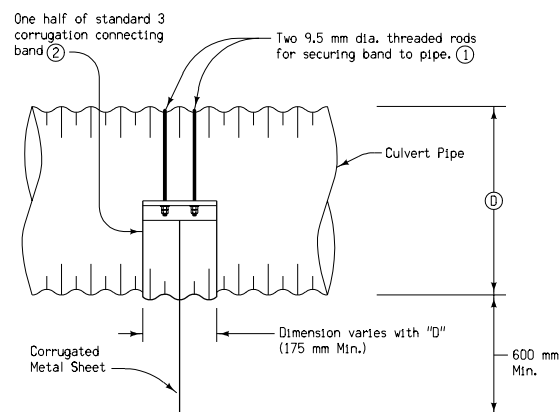

SIDE VIEW

GENERAL NOTES:

Type 'A' Diaphragm is an anti-seep device for use on let-down structures and shall be installed directly below the upstream shoulder of the dike.

Type "A" Diaphragm shall consist of a sheet of corrugated metal of the dimensions indicated hereon and of the same thickness as the pipe used for culvert pipe. This sheet may be fabricated from one or more sheets of corrugated metal. If two or more sheets are used, they shall be lapped a minimum of one corrugation and welded or riveted at 75 millimeter centers along the seam. The sheet shall be welded on both sides to a standard half connecting band of the dimensions indicated hereon. This assembly shall then be securely attached to the pipe by means of two 9.5 millimeter diameter rods of appropriate length placed in two adjacent valleys of the corrugated pipe and threaded with double nut and washer.

Note:

Details are shown using corrugated metal culvert pipe. Appropriate modifications as indicated, subject to the approval of the Engineer, shall be made as necessary where concrete culvert pipe is used.

- ① Normal half of connecting band may be used in lieu of rods when approved by the Engineer.
- ② Use flat steel band of equivalent dimensions where Type 'A' Corrugated Metal Diaphragm is to be installed on Concrete Culvert Pipe.
- ③ Corrugated Metal Sheet shall be continuously welded to the connecting band. Shape to fit outside pipe diameter.

All dimensions given in millimeters unless noted.

M	Iowa Department of Transportation		
	Highway Division		
	STANDARD ROAD PLAN		RF-7
	REVISION: Modify General Notes. No Longer a Bid Item.		REVISION NO.
	4		REVISION DATE
METRIC VERSION	William J. Skan		04-15-03
	APPROVED BY DESIGN METHODS ENGINEER		
	TYPE 'A' CORRUGATED METAL DIAPHRAGM		